

**SXW SERIES**

**105°C Overvoltage Vent Operation Facility,  
Lead Wire Type**

**◆ FEATURES**

- Load Life : 105°C 1000~2000 hours.
- Body diameter of  $\phi$  10mm to  $\phi$  18mm with high ripple current capability.
- This series has specification of vent operation in overvoltage situation. Please consult us for any further details.
- RoHS compliance.

**◆ SPECIFICATIONS**

Items	Characteristics							
Category Temperature Range	-25 ~+105°C							
Rated Voltage Range	200, 400V.DC							
Capacitance Tolerance	$\pm 20\%$ (20°C,120Hz)							
Leakage Current(MAX)	$I=3 \sqrt{CV}$ (After 5 minutes application of rated voltage) I=Leakage Current(μA)    C=Rated Capacitance(μF)    V=Rated Voltage(V)							
Dissipation Factor(MAX) (tanδ)	0.15(20°C,120Hz)							
Impedance Ratio(MAX)	<table border="1"> <tr> <td>Rated Voltage (V)</td> <td>200</td> <td>400</td> </tr> <tr> <td>Z(-25°C)/Z(20°C)</td> <td>3</td> <td>8</td> </tr> </table> (120Hz)		Rated Voltage (V)	200	400	Z(-25°C)/Z(20°C)	3	8
Rated Voltage (V)	200	400						
Z(-25°C)/Z(20°C)	3	8						
Endurance	After applying rated voltage with rated ripple current for time of right table at 105°C, the capacitors shall meet the following requirements. <table border="1"> <tr> <td>Capacitance Change</td> <td>Within <math>\pm 20\%</math> of the initial value.</td> </tr> <tr> <td>Dissipation Factor</td> <td>Not more than 200% of the specified value.</td> </tr> <tr> <td>Leakage Current</td> <td>Not more than the specified value.</td> </tr> </table>		Capacitance Change	Within $\pm 20\%$ of the initial value.	Dissipation Factor	Not more than 200% of the specified value.	Leakage Current	Not more than the specified value.
Capacitance Change	Within $\pm 20\%$ of the initial value.							
Dissipation Factor	Not more than 200% of the specified value.							
Leakage Current	Not more than the specified value.							
	<table border="1"> <tr> <td>Rated Capacitance (μF)</td> <td>Life Time (hrs)</td> </tr> <tr> <td>4.7</td> <td>1,000</td> </tr> <tr> <td>10 or over</td> <td>2,000</td> </tr> </table>		Rated Capacitance (μF)	Life Time (hrs)	4.7	1,000	10 or over	2,000
Rated Capacitance (μF)	Life Time (hrs)							
4.7	1,000							
10 or over	2,000							

**◆ MULTIPLIER FOR RIPPLE CURRENT**

Frequency coefficient


	Frequency (Hz)	60(50)	120	500	1k	10k≤
Coefficient	200WV	0.8	1.0	1.10	1.14	1.18
	4.7μF	0.65	1.0	1.05	1.10	1.15
	10~100μF	0.8	1.0	1.05	1.10	1.15

**◆ PART NUMBER**

   SXW  
 Rated Voltage    Series           Rated Capacitance        Capacitance Tolerance          Option         Lead Forming          D×L  
 Case Size

## ◆DIMENSIONS

(mm)

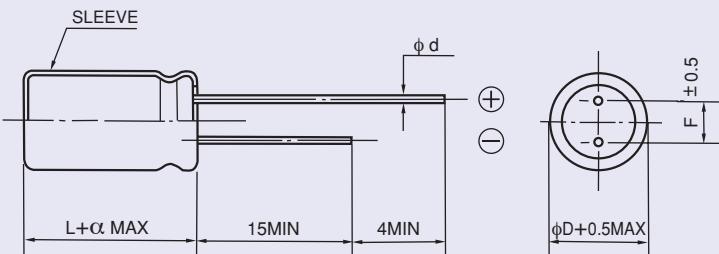

φ D	10	12.5	16	18
φ d	0.6		0.8	
F	5.0		7.5	
α	1.5			

## ◆STANDARD SIZE

Cap (μF)	WV	200	
		φ 16	φ 18
68	16x20	0.32	
82	16x20	0.36	18x20 0.37
	16x25	0.38	
100	16x25	0.43	18x20 0.43
	16x30	0.45	
120	16x25	0.48	18x20 0.46
	16x30	0.50	18x25 0.48
130		18x20 0.46	
150	16x30	0.57	18x20 0.50
	16x35	0.59	18x25 0.53
			18x30 0.58
180	16x40	0.66	18x25 0.60
			18x30 0.62
220		18x30 0.71	
		18x35 0.74	
270		18x35 0.77	
		18x45 0.89	
330		18x40 0.91	

Cap (μF)	WV	400			
		φ 10	φ 12.5	φ 16	φ 18
4.7	10x10	0.060			
10	10x16	0.087	12.5x20 0.10		
22				16x20 0.17	
				16x25 0.18	
27				16x25 0.22	
33				16x25 0.22	18x20 0.23
				16x30 0.24	18x25 0.25
36					18x20 0.24
39				16x30 0.27	18x25 0.27
47				16x30 0.30	18x20 0.28
				16x35 0.32	18x25 0.30
56				16x35 0.34	18x30 0.35
68				16x40 0.39	18x35 0.40
82					18x40 0.46
					18x45 0.48
100					18x45 0.52

Size φ D×L(mm)

Ripple Current (A r.m.s./120Hz, 105°C)