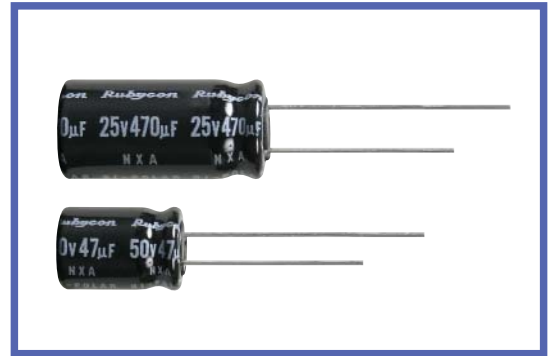


NXA SERIES
105°C Bi-polar Miniaturized
◆ FEATURES

- RoHS compliance.


◆ SPECIFICATIONS

Items	Characteristics																					
Category Temperature Range	-55 ~ +105°C																					
Rated Voltage Range	6.3~50V.DC																					
Capacitance Tolerance	± 20%(20°C, 120Hz)																					
Leakage Current(MAX)	I=0.03CV or 3µA whichever is greater. (After 5 minutes application of rated voltage) I=Leakage Current(µA) C=Rated Capacitance(µF) V=Rated Voltage(V)																					
Dissipation Factor(MAX) (tanδ)	<table border="1"> <thead> <tr> <th>Rated Voltage (V)</th> <th>6.3</th> <th>10</th> <th>16</th> <th>25</th> <th>35</th> <th>50</th> </tr> </thead> <tbody> <tr> <td>tanδ</td> <td>0.25</td> <td>0.25</td> <td>0.20</td> <td>0.20</td> <td>0.15</td> <td>0.15</td> </tr> </tbody> </table> (20°C, 120Hz)	Rated Voltage (V)	6.3	10	16	25	35	50	tanδ	0.25	0.25	0.20	0.20	0.15	0.15							
Rated Voltage (V)	6.3	10	16	25	35	50																
tanδ	0.25	0.25	0.20	0.20	0.15	0.15																
Endurance	After applying rated voltage with rated ripple current for 1000hrs at 105°C, (The polarity shall be reversed every 250hrs.), the capacitors shall meet the following requirements. <table border="1"> <tbody> <tr> <td>Capacitance Change</td> <td>Within ± 25% of the initial value.</td> </tr> <tr> <td>Dissipation Factor</td> <td>Not more than 200% of the specified value.</td> </tr> <tr> <td>Leakage Current</td> <td>Not more than the specified value.</td> </tr> </tbody> </table>	Capacitance Change	Within ± 25% of the initial value.	Dissipation Factor	Not more than 200% of the specified value.	Leakage Current	Not more than the specified value.															
Capacitance Change	Within ± 25% of the initial value.																					
Dissipation Factor	Not more than 200% of the specified value.																					
Leakage Current	Not more than the specified value.																					
Low Temperature Stability Impedance Ratio(MAX)	<table border="1"> <thead> <tr> <th>Rated Voltage (V)</th> <th>6.3</th> <th>10</th> <th>16</th> <th>25</th> <th>35</th> <th>50</th> </tr> </thead> <tbody> <tr> <td>Z(-25°C)/Z(20°C)</td> <td>4</td> <td>3</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> </tr> <tr> <td>Z(-40°C)/Z(20°C)</td> <td>8</td> <td>6</td> <td>4</td> <td>4</td> <td>4</td> <td>4</td> </tr> </tbody> </table> (120Hz)	Rated Voltage (V)	6.3	10	16	25	35	50	Z(-25°C)/Z(20°C)	4	3	2	2	2	2	Z(-40°C)/Z(20°C)	8	6	4	4	4	4
Rated Voltage (V)	6.3	10	16	25	35	50																
Z(-25°C)/Z(20°C)	4	3	2	2	2	2																
Z(-40°C)/Z(20°C)	8	6	4	4	4	4																

◆ MULTIPLIER FOR RIPPLE CURRENT

Frequency coefficient


Frequency (Hz)		60(50)	120	500	1k	10k≤
Coefficient	0.47~1µF	0.50	1.00	1.20	1.30	1.50
	2.2~4.7µF	0.65	1.00	1.20	1.30	1.50
	10~47µF	0.80	1.00	1.20	1.30	1.50
	100~1000µF	0.80	1.00	1.10	1.15	1.20

◆ PART NUMBER

□□□	NXA	□□□□□	□	□□□	□□	D×L
Rated Voltage	Series	Rated Capacitance	Capacitance Tolerance	Option	Lead Forming	Case Size

◆ DIMENSIONS

(mm)

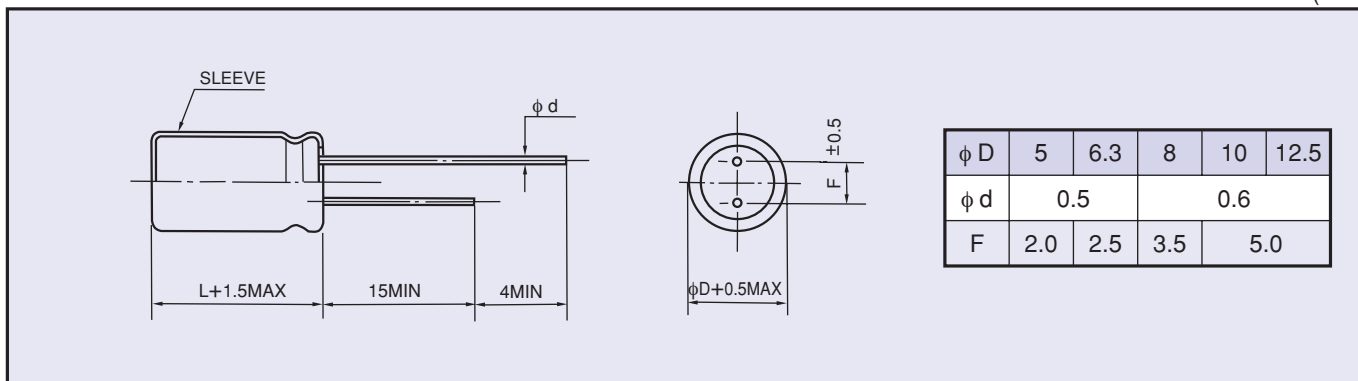
◆ STANDARD SIZE

 Size $\phi D \times L$ (mm), Ripple Current (mA r.m.s./105°C, 120Hz)

Cap(μF)	WV (V.DC)	6.3 (0J)		10 (1A)		16 (1C)		25 (1E)	
		Size	Ripple	Size	Ripple	Size	Ripple	Size	Ripple
33								5×11	49
47						5×11	54	6.3×11	68
100		5×11	63	6.3×11	68	6.3×11	84	8×11.5	111
220		6.3×11	68	8×11.5	135	8×11.5	137	10×12.5	182
330		8×11.5	135	8×11.5	147	10×12.5	202	10×16	247
470		8×11.5	161	10×12.5	212	10×16	262	10×20	333
1000		10×16	297	10×20	378	12.5×20	472		

Cap(μF)	WV (V.DC)	35 (1V)		50 (1H)	
		Size	Ripple	Size	Ripple
0.47				5×11	7
1				5×11	12
2.2				5×11	14
3.3				5×11	19
4.7				5×11	23
10				5×11	30
22		5×11	44	6.3×11	44
33		6.3×11	56	6.3×11	56
47		6.3×11	68	8×11.5	78
100		10×12.5	142	10×16	149
220		10×20	256	12.5×20	277
330		12.5×20	343	12.5×25	364
470		12.5×25	402		